

B400LDA L.E.D Beacon [Multi-function array]

The B400 series comprises Xenon strobe beacons, permanent filament bulb or halogen beacon, blinking filament bulb or halogen beacon, rotating halogen beacon and a multi-function L.E.D. array beacon.

The surface mount base can also be supplied with a right angle bracket or with a pole mounted assembly.

Flash patterns:

Stage 1: [Selectable on board]	Stage 2: DC only [Remotely selectable]	Stage 3: DC only [Remotely selectable]
All L.E.D's on	Alternate Side Flash 1:1 2Hz	Double Strike Flash 2Hz
Rotating: Fast 1	Rotating: Fast 2	All L.E.D's on
3 Rotating: Fast 2	Double Strike Flash 2Hz	All L.E.D's on
Rotating: Slow 1	Alternate Side Flash 1:1 2Hz	All L.E.D's on
Rotating: Slow 2	Double Strike Flash 1Hz	All L.E.D's on
Double Strike Flash 1Hz	Alternate Side Flash 1:1 2Hz	All L.E.D's on
Single Strike Flash 2Hz	Rotating: Fast 2	All L.E.D's on
Double Strike Flash 2Hz	Rotating: Fast 2	All L.E.D's on
Alternate Side Flash 1:1 2Hz	Rotating: Fast 2	All L.E.D's on

Accessories:

B400RAB001
Wall bracket



B400TMA001
Pole mount assembly
(140mm)




Maahantuonti ja myynti:
Autrosafe Oy
puh. (09) 270 90 120
www.autrosafe.fi

Part codes:

Version:	Part code:
10-50V dc	B400LDA050B/[x]
115V ac	B400LDA115B/[x]
230V ac	B400LDA230B/[x]
[x] = Lens colour:	A: Amber B: Blue C: Clear G: Green R: Red Y: Yellow

Current consumption:

Version:	Current:	
10-50V dc	400mA @ 24V dc	
115V ac	50/60Hz	140mA
230V ac	50/60Hz	70mA

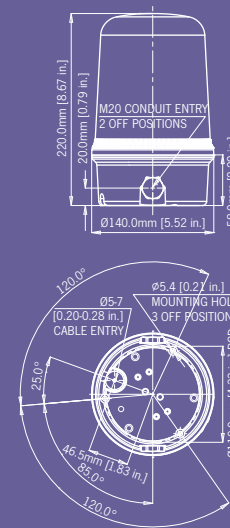

Specification:

Light source:	Array of 32 high output L.E.D.'s
Function:	Total of 9 user selectable operation modes: • 4 rotating configurations. • 4 flashing configurations. • Steady mode for status applications.
Stages:	DC unit: remotely selectable 2nd & 3rd stage pattern.
Peak candela:	30 cd* - measured ref. to I.E.S.
Effective candela:	30 cd* - measured ref. to I.E.S.
Lens colours:	Amber, Blue, Clear, Green, Red & Yellow
Lens type:	Prismatic (default) or plain
Mounting:	Surface mount (right angle or pole mount accessories available)
Entries:	1 x 5-7mm push through grommet 2 x M20 cable entry
Dimensions:	ø140 x 220mm
Ingress protection:	IP65
Housing material:	High impact UL94 V0 (f1) PC
lens material:	High impact UL94 V0 (f1) PC
Terminals:	1.5 mm ² flying lead assembly
Operating temp:	-25 to +50°C
Storage temp:	-40 to +70°C
Relative humidity:	90% at 20°C.
Weight:	845g AC 595g DC

*Candela measurements representative of performance with clear lens at optimum voltage.

Features:

- Bayonet fixing lens.
- Anti-tamper locking screw.
- Stainless steel fixings.
- Multiple cable entries

Approvals:

- GOST-R certificate: POCC GB.JB05.H00144.