

## Mexodus Range

The Mexodus range of high quality LED exit sign luminaires is perfectly suited to modern architectural environments. Offering ease of installation, these exit sign luminaires have an attractive flat design with the exit legend being framed by a high quality aluminium extrusion measuring just 237x137mm.

The specially screened light-conducting panel ensures a uniform illumination and due to their high luminance of  $> 500\text{cd/m}^2$  are ideal for use in brightly lit environments. Along with their slim design and four different mounting options, Mexodus luminaires are DALI addressable and offer countless possibilities for the seamless integration of lumen efficient exit signage into existing structures and new installations.



### MAXIMUM SAFETY

In addition to using a 3-chip LED each LED is powered alternately on the panel meaning that if a LED fails in a high impedance state only one in three LEDs will fail and the legend remains lit.



### Self-Test and DALI

As standard the Mexodus functions as a stand-alone Self-Test exit sign or can be connected to a DALI system and can also be configured for non-maintained, maintained or switched maintained operation.

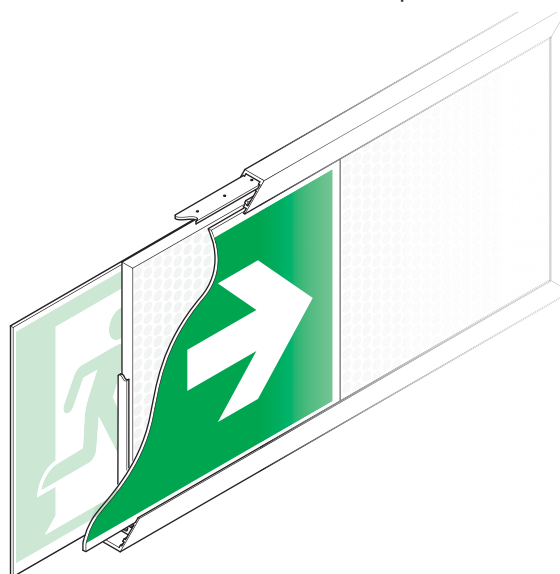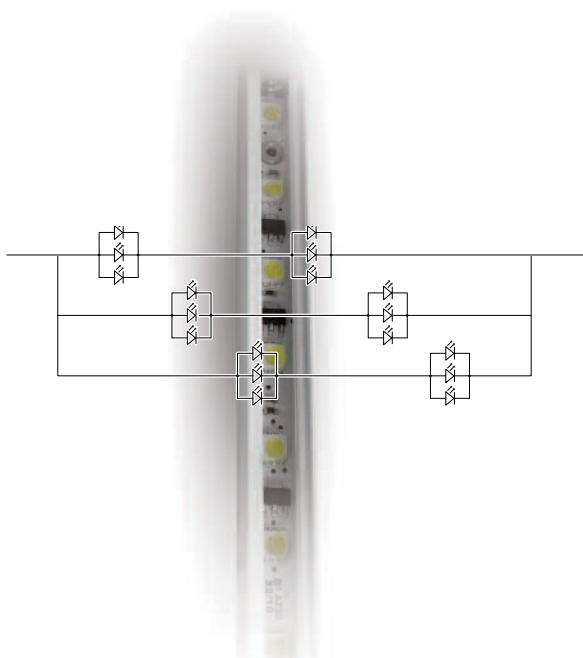

Exit legends can be easily changed without the need for tools.




## GENERAL SPECIFICATION

Operation	Non-maintained, maintained or switched maintained
Light source	10 x 3 chip white LEDs
Battery	6.4V 1.5Ah Li-Fe
Charge current	150mA nominal
Recharge period	24 hours (14hrs for 1hr duration)
Input voltage	230Volt +/- 10% ~ 50Hz
Power	4.8W / 8.0VA
IP Rating	IP 20



ME/WBRK/DALI/WH

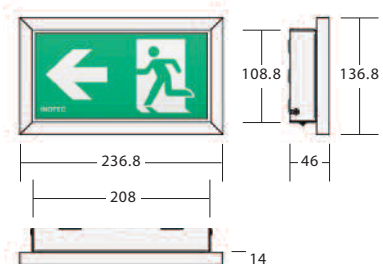




ME/RECE/DALI/WH



ME/ROD/DALI/WH



ME/WIRE/DALI/WH

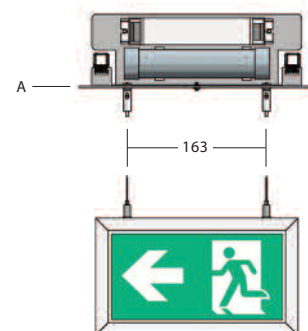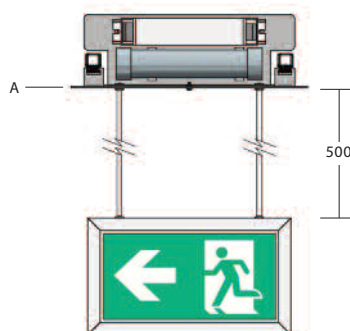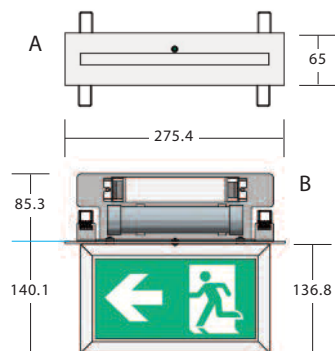

### NOTE:

All high mounted versions share a common fixing plate 'A' and recessed gear tray 'B'.  
Wire lengths are adjustable to 1metre.



AUTROSAFE OY  
Puh. (09) 2709 0120  
www.autrosafe.fi

# Mexodus

## ORDER CODES

ME/WRK/DALI/WH  
ME/RECE/DALI/WH  
ME/WIRE/DALI/WH  
ME/ROD/DALI/WH

## Description

Wall mounted, white  
Ceiling mounted, recessed, white  
Wire suspended, white  
Rod suspended, white

## OPTIONS:

/GR Grey painted finish  
/DS Double sided

## LEGENDS:

/ECAR EC Format — Arrow Right  
/ECAL EC Format — Arrow Left  
/ECAD EC Format — Arrow Down  
/ISOAR ISO Format — Arrow Right  
/ISOAL ISO Format — Arrow Left  
/ISOAU ISO Format — Arrow Up



AUTROSAFE OY  
Puh. (09) 2709 0120  
www.autrosafe.fi